





Energy efficient window & doors with aluplast-technology

uPVC WINDOWS
YOUR PERFECT CHOICE




Come with us on a journey through the world of uPVC windows and discover their shapes, colours, quality and energy efficiency.



Table of Contents

Interesting facts	
How is the uPVC window constructed?	5
Window types and colours	E
Product range	7
smart-slide new generation of sliding doors	8
Hardware essential background	12
Glazing a visible part of the window	13
Noise reduction	14
Sound insulation	15
Energy efficiency	16
Tropical compound	17
BAL40 Windows	18
Unique Properties	19

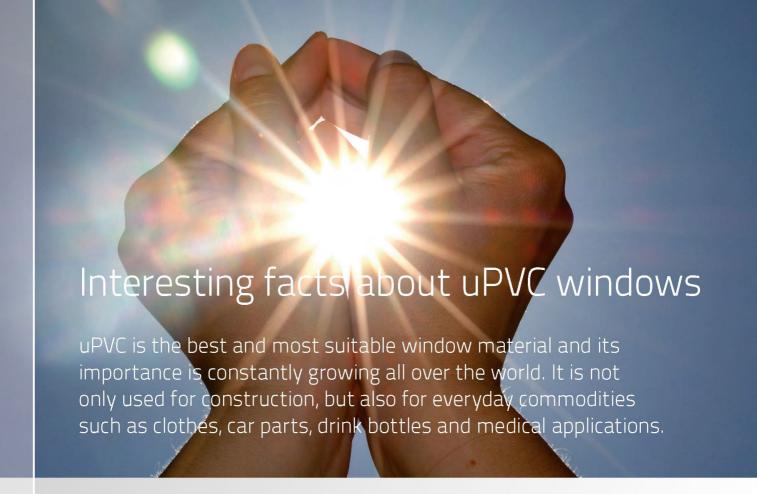

The unparalleled material uPVC offers a whole range of outstanding product properties to create a window that remains unbeaten by any other raw material. Purchase costs of uPVC windows are far more economical than a comparable product made of wood or aluminium. There are great many of aspects that play a significant role when choosing new windows. For this reason, we would like to present you some interesting facts about uPVC windows that will help you with your decision making:

1. ENERGY EFFICIENCY OF UPVC WINDOWS

- use of lead-free uPVC raw material
- easy to recycle
- energy saving (in both production and thermal insulation)

2. QUALITY OF UPVC WINDOWS

- uPVC is completely harmless to humans
- excellent sound insulation, especially in the growing urban regions
- perfect thermal insulation
- durability and resistance (fire resistance, UV stability, wind resistance)
- the value of your home can be increased by integration of aluplast windows and doors
- very durable (uPVC windows have a life cycle of 30 years or more)

PLEASE NOTE

Windows are no minor matter: They let light into our homes and illuminate our lives. They create the positive feeling of home.

3. PERFORMANCE CHARACTERISTICS OF UPVC WINDOWS

- resistant to dirt and environmental conditions
- can be easily cleaned by using a mild detergent or simply soapy water
- resistant against termites and will never rot, rust or corrode
- cannot be deformed by moisture and temperature differences
- prevent development of mould and bacteria
- efficient for many years (without constant effort of conservation by painting or special maintenance measures)
- excellent burglary resistance

4. VARIETY OF DESIGNS


- appealing visual appearance with various types
- different shapes, e. g. semi-circular windows
- available in countless colour variations, laminated outside or on both sides
- suited for both new buildings and renovation of old buildings
- customised for individual requirements






How is the uPVC window constructed?

The detailed section of single components of a uPVC window




WINDOW FRAME

holds the window sash and serves to fasten the window to the building structure.




WINDOW SASH

is the movable element which allows you to open and close the window.




GLAZING BEADS

are inserted into the window sash and serve to fix the glass pane.




GASKETS

co-extruded gaskets ensure improved heat and sound insulation.



STEEL REINFORCE-MENTS

are integrated into the window frame and sash to ensure maximum load bearing capacity.



GLAZING

protects you from external influences while still allowing the view to outside.

Window types there is something for every taste

Window and door types are distinguished by their way of installation and opening.



FIXED GLAZING

The glazing is inserted directly into the frame – there is no sash that could be opened.




CASEMENT-**OUTWARD OPENING**

The sash is to be opened outwards.



MULTI-SLIDE

The sash can be slid to the side to open the window. Multiple sashs can be used to stack



TILT-AND-SLIDE

The sash can be tilted and slid to one side to open the window.



SLIDE AND FOLD

The sashes can be folded, each running along a runner rail.



TILT-AND-TURN FUNCTION

The window can be opened to the inside like a casement and it can be tilted.



AWNING - OPENING **OUTWARD**

The window can be opened to the inside and it can be tilted.



SMART-SLIDE

The sash is shifted off the gasket horizontally and slides, providing superior tightness against weather and noise. Multiple sashs can be used to stack




LIFT-SLIDE

The sash is lifted vertically off the gasket and can slide the largest panels with ease. .



Many combinations available.



uPVC WINDOWS ARE **NOT NECESSARILY WHITE**

Colour your life and choose your favourite. The aluplast use a special manufacturing technique to apply the décor lamination foil on the uPVC window profiles. This technique guarantees an even structure, a uniform colour, and maximum weather resistance while meeting the highest requirements regarding climatic influences.



Product range, full of possibilities

Windows are a long-lasting investment. For this reason you should select a product suitable for your requirements.



IDEAL 2000®

IDEAL 2000® is the most substantial 3 to 4-chamber window system with two levels of sealing and a 60 mm construction depth. The window offers the best possible price-performance ratio and a perfect economic efficiency. It is the right window solution for fixed, tilt-and-turn and casement openings. Many possible variations allow for the use of the system in the domain of commercial buildings as well as private homes.



IDEAL 4000®

With 5 chambers as a standard combination, sound insulation up to 45 dB and a construction depth of 70 mm, the IDEAL 4000® windows offer excellent thermal insulation properties – delivering a range of windows today, which satisfy the standards of tomorrow. It is the best suitable window for large doors for balconies and terraces.



SLIDING SYSTEMS

The aluplast sliding window series with its slender design will meet your individual requirements. From economical window solutions to huge balcony doors, many options are possible.



LIFT-SLIDE

With its smooth-running lifting mechanism, even huge sliding elements – with a width up to 3m, a construction depth of 85mm and with large reinforcements for the highest degree of stability – can be moved very easily. The wide opening provides a harmonious transition from living to outdoor areas without disturbing steps while maintaining best sealing values.



LEAVES NOTHING TO BE **DESIRED**


Get into the new generation of sliding doors with smart-slide.


smart-slide

- simple to operate
- recessed threshold solution
- WERS U_w rating as low as 1.1 W/m²K
- glazing and panel thickness up to 41 mm possible double and triple glazed)
- modern classic-line design
- concealed hardware technology
- scheme A (single door) and scheme C (bi-parting doors)
- available in numerous decor designs
- optional bonding inside (adhesive technology)
- Profile depth of 140 mm



May be subject to change

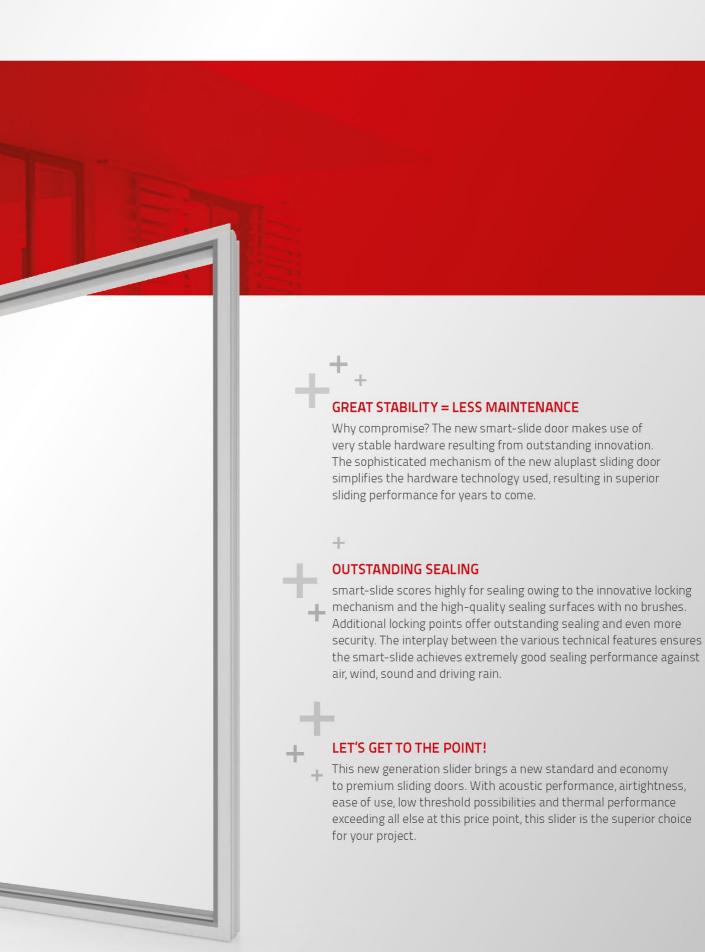

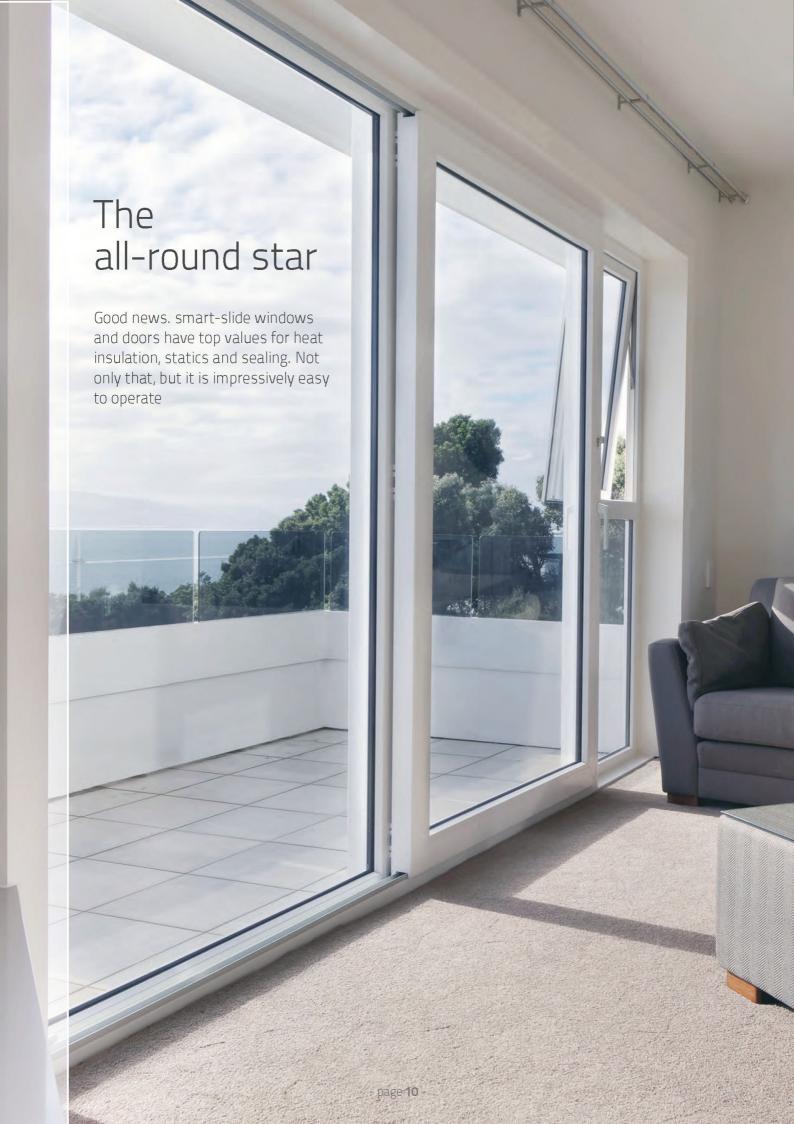

8

IMPROVED CONVENIENCE THROUGH EASE OF OPERATION

Large glass surfaces are very much in vogue. This includes generously dimensioned sliding doors, which open up to bring the outdoors into the living space. This won't be a problem for you, as smart-slide can be manufactured in very large dimensions. You will love the locking mechanism, with the sash sliding effortlessly and sealing tightly with a simple operation of the handle. This makes smart-slide windows and doors so simple to use that it is virtually impossible to operate incorrectly.





Hardware has a wide range of functions. It connects the window frame with the sash and allows operation of windows and doors. For this reason, we would like to present some interesting facts about the Hardware in uPVC windows that will help you with your decision making



SASH LIFTER

Tilt-and-turn hardware lifts the sash into the correct position with minimal effort and guarantees a long service life.



LOCKABLE HANDLE

When it comes to security multiple options are available. This includes a lockable handle which can increase the window or door security by restricting operation as required.



TURNING HANDLE

The essential operating control of a window fitting is the turning handle. A simple turn of the handle can open, close, tilt or fold the window or door.



MULTIPOINT LOCKING

Increased security thanks to a multipoint locking system. The system guarantees basic security.

PLEASE NOTE

We will be happy to show you further detailed information on hardware.

Based on the great variety of windows, there are hardware systems for all window types. The hardware is a significant component of the window, especially for handling and security. The hardware for the most common European tilt and turn systems offers the best safety, security and comfort for your home. However, good hardware for casement and sliding systems is also available.

Glazing – a visible part of the window

The importance of window glass has also been integrated in your window choice. Many solutions are available:



PLEASE NOTE

The solar heat gain coefficient should be as low as possible while the light admission should be as high as possible. We will be pleased to help you.

DOUBLE GLAZING

Double or even triple glazed units are separated by an air or other gas space like Argon, to reduce heat transfer and / or sound transmittance across a part of the building envelope. In modern insulated glass units, the space between the glass panes is kept dry by the use of desiccant and the edges are sealed to eliminate possible condensation and provide superior insulating properties.

REPLACE TINTED GLASS WITH LOW E GLASS

Low Emissivity ("Low-E") glass has a special invisible coating bonded to the glass inside the double glazing unit. This coating reduces heat loss from the home, by essentially acting like a "heat mirror" that reflects heat back into your home. Low E can also reduce solar heat gain that can overheat your house, while also insulating your house from the temperature outside. Low-E glass greatly enhances the insulating performance by as much as an additional 60% compared to standard double glazing.

TEMPERED GLASS - CHANGE TO TOUGHENED GLASS

A type of safety glass processed by controlled thermal or chemical treatments to increase its strength compared with normal glass. Fully toughened glass is approximately 4 to 5 times stronger than heat treated glass of the same thickness when exposed to uniform static pressure loads.

LAMINATED GLASS

Two or more panes of glass permanently bonded together with one or more interlayer. Laminated glass offers good acoustic insulation and a high protection factor against burglary.

LIGHT ADMISSION - CHANGE TO VISIBLE LIGHT TRANSMISSION

VLT is the percentage of visible light passing through the glass. The higher the VLT, the more light is transmitted.

SOLAR HEAT GAIN COEFFICIENT

The Solar Heat Gain Coefficient, SHGC, measures how well a window blocks heat from the sun. Therefore, the lower the SHGC, the lower the amount of heat gain. SHGC ratings are shown as a number between 0 and 1. The lower the number, the better the window is at blocking solar heat.

Noise reduction – feel the silence & the comfort

Open Window ~ 80 dB (heavy traffic)

Old Window ~ 60 dB (single glazed)

Standard Window~ 48 dB (double glazed)

uPVC Window ~ 35 dB (Ideal 4000)

INFLUENCING FACTORS

- 1. Frame
- 2. Glazing
- 3. Glass Packers
- 4. Installation





NOISE PROTECTION

Being exposed to permanent, or even only to a short-term but intensive, noise, can lead to a harmful impact on human health. Thus, noise protection is an imperative. We can provide you with the best possible protection against unwanted negative noise effects.



Sound insulation – for a better quality of life

dB (decibel) is commonly used in acoustics to quantify sound levels perceived by the human ear.

Noise has an immense impact on our quality of life. The results are sleep loss and continuous stress that can cause permanent damage to

our health. uPVC windows are an effective protection from noise and create a permanently pleasant atmosphere.

Health Impacts	140 dB 130 dB	Starting aircraft	
Hearing impairment caused by short impact	120 dB 110 dB 100 dB	Jackhammer	
Hearing impairment caused	90 dB 80 dB	Highway traffic Open window	
by continuing noise	70 dB 60 dB 50 dB	Single glazed window	
Concentration distrurbances	40 dB 30 dB	Normal conversation uPVC window	
	20 dB 10 dB 0 dB	Bedroom	
Threshold of hearing			



Energy efficiency – living comfort and environmental protection


Innovative high-quality uPVC windows cut energy losses to a minimum. With uPVC windows you can contribute to the conservation of increasingly scarce resources and to the reduction of pollutant emissions. Combine environmental protection and I iving comfort by insulating with uPVC windows.

The U-value determines the heat transfer coefficient of the material. The w in this term stands for the entire window.

The calculation of this is based on the U-values and the size of each single material of all components. This means the glass, the frame material as well as the psi-value, which describes the heat flow generated through the insulated glass edge with the distance piece.

U-VALUE (UW)

- = U-value glazing (U_g) * Area glazing (A_g)
- + U-value frame (U_f) * Area frame (A_f)
- + Psi-value (Ψ) * length of the edge bond (I)
- / Area glazing (A_o) + Area frame (A_f)







Tropical compound – for regions with high UV radiation

aluplast can look back on more than 20 years of experience in providing tropical uPVC formulations to regions with very high levels of UV radiation.

In order to make sure that uPVC windows remain stable and robust even under harsh environmental conditions, aluplast developed a special uPVC compound called Tropical Mix. This "tropical" formulation and the profiles have been tested and certified by AAMA (American Architectural Manufacturers Association).

AAMA tests the profiles at accredited laboratories under natural weathering conditions. The profiles are tested in three different weathering stations in Ohio, Florida and Arizona for two years where they have to prove their stability against UV light, wind load and humidity.

In artificial and natural weathering tests, aluplast proved the profiles' outstanding durability, weather resistance, and quality, and was finally awarded with the AAMA certification. All tests, for example the Charpy impact test, were passed with ease and without any restrictions, even after two years of weathering.

Environmentally friendly calcium–zinc (CaZn) stabilizers ensure that you will enjoy your eco-friendly, high–quality windows and doors for many years to come. aluplast has excellent verified references in the Middle East, Asia, Africa and Australia regarding the successful use of our tropical formulation.

Today we are proud to say that we can supply customers worldwide with an extended tropical profile portfolio and that we are able to react flexibly to the different market requirements. Stay ahead of the times with innovative technologies developed by aluplast.



Many Australian homes are located in areas prone to bushfire attack. Changes to the BCA in 2011 and the revision of AS3959-2018, have increased the stringency around the selection of windows and doors for new build or renovation projects in bushfire prone areas. These changes are intended to reduce the risk of loss of life or damage to property in bushfire areas.

aluplast systems are designed to withstand the harshest conditions. Our BAL40 windows and doors use the latest technology in German hardware and incorporate the latest in soft coat low-e technology from Viridian. Not only does this create a safer barrier for your home, it dramatically improves your everyday comfort by increasing the insulating properties of the Double Glazing. This keeps you cooler in summer and warmer in winter. What's more, the need for expensive fire screens and shutters is eliminated.


Selecting aluplast windows and doors can give you peace of mind as well as an extra layer of comfort that you may not have had access to in the past. At Astellite, we now offer Australia's most affordable, energy efficient range of BAL40-Bushfire rated windows and doors.



aluplast BAL40 rated systems include:



aluplast BAL40 certified window and door products are identifiable with the above logo. This logo confirms that the system has been developed, engineered, tested and manufactured as suitable for use in a BAL40 zone.

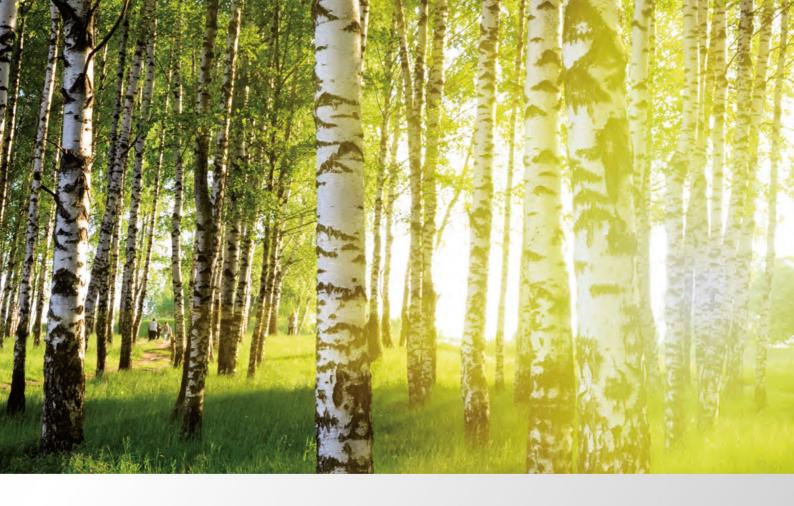

Unique Properties

QUALITY - MADE IN GERMANY

Experience and constant development play a crucial role in the production of uPVC windows. With close and cooperative partnerships with reliable and renowned suppliers, we focus on environmental protection, sustainability and guarantees the highest level of quality and performance.

The extruded aluplast uPVC window profiles are tested according to local standards and are subject to constant quality control.

RESPONSIBILITY – FOR THE ENVIRONMENT

uPVC windows do not only present long-lasting durability but they can also be recycled which is another environmental advantage.

Plastics are up to 100% recyclable without loss of quality. Due to the fact that PVC windows are produced environmentally friendly, the PVC windows can be made out of recyclable material and can be re-used in the future to extend the lifecycles.

Up to 40% of a homes energy loss can come from the window and door area, these parts of the building envelope are the focus of the efforts to save valuable energy and reduce the costs for heating and/or cooling.

The uPVC windows of aluplast profiles are suitable even for the top ranked Passivhaus-Standard (Passive House Standard). This fact ensures the lowest energy consumption. Our profiles are also in compliance with the latest Environmental Product Declaration (EPD) according to the DIN ISO 14025 which reflects the suberb results of the health – and environmental aspects of the uPVC in the whole life circle.

INNOVATION – AT THE HIGHEST LEVEL

Based on our expertise, we develop innovative highquality products that set professional standards in our field. aluplast profiles exceed today's requirements for heat and noise insulation, burglary resistance and are of elegant design. To buy our products is to buy long lasting durability, to choose the finest quality, backed by a solid company with many years of experience.

Save energy, reduce costs and secure the future - with Astellite and aluplast.

Kitchen and Bathroom Studio

Level 1, 232 Bridge Road Richmond, VIC 3121 Australia

Phone: +61 0417 774 757 www.kitchen and bathroomstudio.com.au



